


# RIMA\_C101\_VA(R)

## STANDARD EQUIPMENT

- Multiplexable / connectable
- Exhibition area in stainless steel
- Electronic control of the temperature
- Programmable automatic defrosting
- PVC skin coated steel exterior
- Easy access to the evaporator
- Canopy LED lighting Injected sides
- Adjustable feet.
- Ventilated refrigeration (with R404A refrigerant)
- All trims supporting glasses and shelves in aluminum
- Stainless steel service table
- Digital thermometer
- Sloping flat glass, top hinged
- Tempered glass
- Temp: 2 – 5°C / 35 – 40°C

## FRESH MEAT DELI • DISPLAY CASE

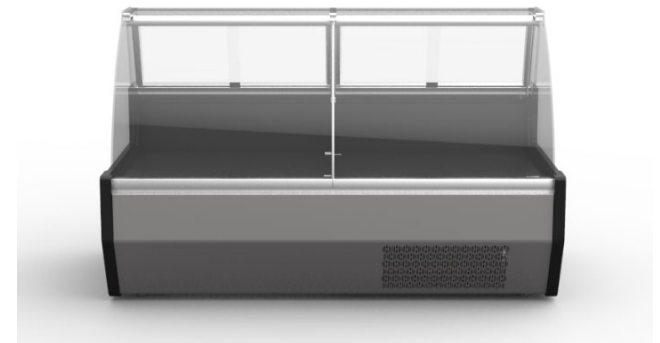


## Accessories

- Containers for Gastro norm Kits
- Staircase exhibitor 1, 2 level (stainless steel)
- Stainless steel exhibition grids
- Gastro norm Kit
- Cutting table
- High levelling feet in stainless steel
- Bags support
- Castors with brakes
- Scale/Knife support
- Glass products partition



REFRIGERATED	Model	O.A. Lengths (Inches)	Volume FT <sup>3</sup>	Electrical 115 V					NEMA 115 V Plug	Weight Lbs		Crate Size (Inches)		
				Compressor		Lights Fans HTRS	EVAP PAN	Total AMPS		No Crate	With Crate	L"	W"	H"
				Front	H.P									
	RIMA_C101VA_100	40.4	12.35	3/8	8.4	0.95	3.3	12.68	5-15P	333	494	48	44	42
	RIMA_C101VA_130	52.2	16.27	1/2	9.6	0.96	3.3	13.89	5-15P	377	560	59	44	42
	RIMA_C101VA_150	60	18.88	1/2	9.6	1.08	3.3	14.01	5-15P	427	626	67	44	42
	RIMA_C101VA_200	77.5	24.7	5/8	8.9	1.68	3.3	13.91	5-15P	531	794	85	44	42
	RIMA_C101VA_250	101.2	32.54	3/4	16	1.81	3.3	21.14	N/A	658	937	109	44	42
	RIMA_C101VA_300	117	37.76	3/4	16	2.06	3.3	21.39	N/A	785	1160	124	44	42

REMT0E	Model	O.A. Lengths (Inches)	115 Volts Total AMPS	BTU	Weight Lbs	
					No Crate	With Crate
	RIMA_C101VA_100	40.4	0.5	2548	278	439
	RIMA_C101VA_130	52.2	0.51	3015	322	505
	RIMA_C101VA_150	60	0.63	3159	373	571
	RIMA_C101VA_200	77.5	0.78	4345	498	761
	RIMA_C101VA_250	101.2	0.91	5152	604	882
	RIMA_C101VA_300	117	1.16	5472	721	1093

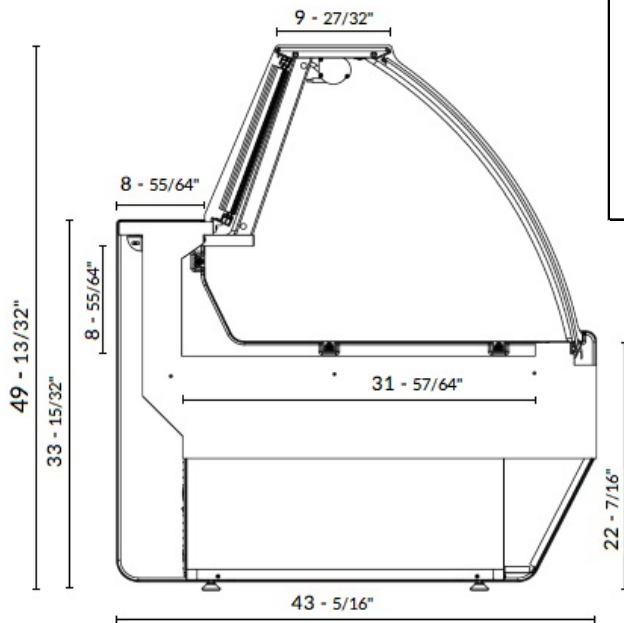

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the compressor the amp load. Remote cases must be hard wired – no plugs.

[www.rimacold.com](http://www.rimacold.com)



Phone: (347) – 809 3544

Email: [contact@rimacold.com](mailto:contact@rimacold.com)