

RIMA_F080_SSR

MERCHANDISER • OPEN CASE



Standard Equipment

- Multiplexable / connectable
- Adjustable feet
- Electronic control of the temperature
- Programmable automatic defrosting
- Stainless steel product holders
- Solid Injected sides with PVC precoated steel
- LED lighting on the shelves
- 4 Levels of shelves, removable, adjustable and tilt able
- PVC skin coated steel exterior
- Only Remote is available
- Temp: 0 – 4°C / 32 – 40°F



Accessories


- Acrylic product stopper
- 1 Level of removable / adjustable hooks (4 Un)
- Prices holder
- Mirror in 45°
- Glass products partition
- Acrylic products partition
- Prices holder for baskets
- 1 Level of Baskets, removable, adjustable and tilt able
- 1 Unit Basket, removable, adjustable and tilt able
- 1 Unit of removable / adjustable hooks
- 1 Level of removable / adjustable hooks with prices holder (4 Un)



RIMA_F080_SSR

MERCHANDISER
•
OPEN CASE

REMOTE	Model	Number of Doors	O.A. Length (inches)	Volume FT ³	Total Amps	BTUS	Weights Lbs		Crate Size Inches		
							No Crate	With Crate	L"	W"	H"
	RIMA_F080PT_130R	2 x 23 - 1/2	51.5	37.63	1.43	3345	555	763	54	36	85
	RIMA_F080PT_190R	3 x 23 - 1/2	75.4	56.37	2.19	4430	773	1040	78	36	85
	RIMA_F080PT_250R	4 x 23 - 1/2	99.4	75.26	2.86	6811	1110	1526	104	36	85
	RIMA_F080PT_310R	5 x 23 - 1/2	123.2	94	3.62	7795	1328	1803	126	36	85
	RIMA_F080PT_370R	6 x 23 - 1/2	147	112.73	4.38	9397	1546	3052	150	36	85

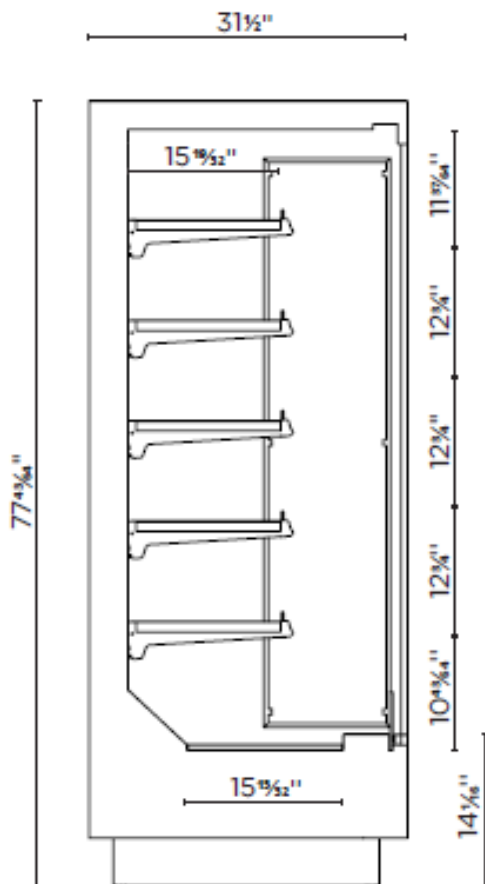

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the compressor the amp load. Remote cases must be hard wired - no plugs.

www.rimacold.com



Phone: (347) – 809 3544

Email: contact@rimacold.com