

RIMA_M101_VA

PACKAGED
MEAT DELI

•
DISPLAY CASE



Standard Equipment

- Ventilated refrigeration (with R404A refrigerant)
- Multiplexible / connectable
- LED lighting
- Adjustable feet
- Electronic control of the temperature
- Programmable automatic defrosting
- Digital thermometer
- Tempered glass
- Sloping flat glass, top hinged
- Injected sides
- Exhibition area in PVC precoated steel
- Refrigerated under storage
- 1 Intermediate Shelf
- PVC skin coated steel service table
- All trims supporting glasses and shelves in aluminum
- PVC skin coated steel exterior
- Temp: 2 – 5°C / 35 – 40°C

Accessories

Castors with brakes

High levelling feet in stainless steel

Glass products partition

Rilsan coated exhibition grids

Stainless steel exhibition grids

Knife support/Scale support/Bags support


Gastronorm Kit/Containers for Gastronorm Kits

Cutting table

RIMA_M101_VA

PACKAGED MEAT DELI • DISPLAY CASE

Selfcontained	Model	O.A. Length (inches)	Volume FT ³		Electrical 115V					NEMA 115 V Plug	Weights lbs		Crate Size Inches		
			Front	Rear	Compressor		Lights Fans HTRS	EVAP Pan	Total Amps		No Crate	With Crate	L"	W"	H"
					H.P	F.L.A									
	M101_VA71_150	60	18.88	5.33	1/2	9.60	0.65	3.30	14.35	5 - 20P	470	692	67	44	42
	M101_VA71_200	77.5	24.7	8.76	1/2	9.60	1.59	3.30	14.52	5 - 20P	575	866	85	44	42
	M101_VA71_250	101.2	32.54	13.41	5/8	8.90	1.80	3.30	14.23	5 - 20P	714	1032	108	44	42

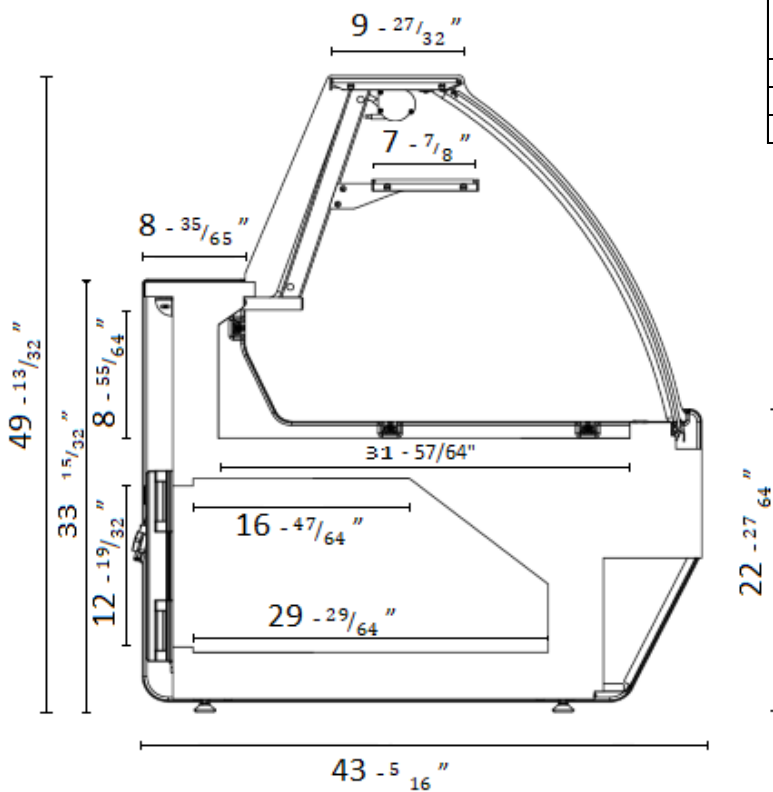

Refrigerated Rear Storage Area	L" x W" x H"
M101_VA71_150	27" x 16-47/64"/29-29/64" x 13-25/64"
M101_VA71_200	44-1/2" X 16-47/64"/29-29/64" X 13-25/64"
M101_VA71_250	68-1/8" X 16-47/64"/29-29/64" X 13-25/64"

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the compressor the amp load. Remote cases must be hard wired - no plugs.

www.rimacold.com

Phone: (347) - 809 3544

Email: contact@rimacold.com